

RANDWICK CAMPUS REDEVELOPMENT MANAGEMENT PLAN - WASTE

17/12/2020 | Revision No: 2.10



Sub Plan Revision Status				
Date	Revision (in numbers)	Purpose and Summary of Amendments	Reviewed by	Approved by
30/01/17	2	General update including LLB GMR and legislative amendments	Tracey Wallbridge	Brian Falls
30/11/17]	2.1]	References to Enablon changed to FOOTPRINT]	Tracey Wallbridge]	Ross Trethewy]
05/09/18	2.2	Clarification of waste recovery targets and project review of waste targets	Tracey Wallbridge	Ross Trethewy
4/12/18	2.3	New Project	Chloe Manning	Elliot Hicks
5/07/19]	2.4]	Updating the plan to reflect comments received]	Chloe Manning]	Elliot Hicks]
12/09/19]	2.5]	Regular three month review, updated EMD]	Nigel Rose]	Richard Yarad]
12/12/19]	2.6]	Regular three month review, updated EMD]	Nigel Rose]	Richard Yarad]
18/03/20]	2.7]	Regular three month review, updated EMD]	Nigel Rose]	Richard Yarad]
17/06/20]	2.8]	Regular three month review, updated EMD]	Nigel Rose]	Richard Yarad]
17/09/20]	2.9]	Regular three month review, updated EMD]	Nigel Rose]	Richard Yarad]
17/12/20]	2.10]	Regular three month review, updated EMD]	Nigel Rose]	Richard Yarad]
[]	[]	[]	[]	[]

*Note that all printed paper/hard copies of this document remain uncontrolled. The controlled copy of this document is found either in the project collaboration tool, within the Project Management Plan section, or other project specific database/server approved by the Regional EHS Manager / Head of EHS Integrated Project.

1. SCOPE OF PROJECT AND SUB PLAN

Project Details	
Scope of the Sub Plan	<p>This Waste Management Sub Plan provides strategies and measures to minimise, manage and track solid and liquid waste generation. It outlines appropriate measures to ensure that solid and liquid wastes are managed appropriately during site establishment, demolition, construction and commissioning of the project. This may include solid construction wastes (soil, concrete, masonry, steel, timber, packaging and various plastics) and liquid wastes (washout waste water) produced during site establishment and construction of the project. It describes measures to be implemented during relevant construction activities, which enables minimisation and reduction of construction wastes.</p> <p>Refer to Section 1.1 and 3.1 of the Project Environmental Health and Safety (EHS) Management Plan for clarification on how the EHS Sub Plans form part of the Lendlease Building (LLB) EHS management system.</p>
Objectives of the Sub Plan	<ul style="list-style-type: none"> • To facilitate consideration of waste reduction and handling during all stages of the project from design to hand-over. • To maximise the beneficial re-use of excavated materials and construction wastes to reduce disposal to landfill. • The Green Building Council of Australia Green Star Rating Tool provides for up to 3 credit points to be achieved for better than 90% recovery (by weight) to landfill. • To recover through reuse and recycling a minimum of 80% (by weight) of all (excluding soil) waste generated on the site. • To ensure reduction, reuse, recycling and disposal data is captured, reported and tracked to ensure compliance with relevant legislation • To prevent environmental pollution associated with waste handling and disposal.
Scope of Works	<p>This Sub Plan has been prepared based on consideration of the following scope of works:</p> <ul style="list-style-type: none"> • The UNSW eastern extension (base building only) • Associated modifications within the ASB (Acute Services Building) • Landscaping

<p>Key Issues and Risks</p>	<p>This Sub Plan is based on the hierarchy of waste avoidance, reuse, recycling, treatment and disposal. Waste must be managed in a way that ensures reuse and recycling is maximised and the volume of waste transported to landfill is minimised.</p> <p>The works described above will result in the generation of waste materials that may include:</p> <ul style="list-style-type: none"> ● Vegetation ● Timber ● Metal ● Concrete ● Soil ● Cardboard and paper ● Paint and chemicals ● Plasterboard ● Wastewater including washout water ● Co-mingled materials. <p>Compliance with the Project EHS Plan and this Waste Management Sub Plan is intended to mitigate the risks and potential impacts of construction activities and waste generation on the environment. The key risks have been identified as:</p> <ul style="list-style-type: none"> ● Over-ordering or inaccurate estimation of material requirements resulting in waste; ● Identification of contaminated soil or hazardous materials requiring testing, treatment, specialist disposal and validation; ● Inappropriate handling and storage of solid waste, liquids, contaminated or hazardous materials resulting in loss or pollution; ● Inappropriate transport and disposal of waste to non-licensed or approved facilities; ● Uncontrolled discharge of paint waste, concrete slurry, wet trade washout or litter into the stormwater system or off-site resulting in pollution; ● Loss of resources and materials of value due to weather events, physical damage or vandalism; ● Disposal of materials due to lack of awareness and behavioural factors; and ● Missing or inaccurate tracking and verification of waste removed from site.
<p>Legislation and Guidelines</p>	<p>Federal/National:</p> <p>Work Health and Safety Act 2011</p> <p>Work Health and Safety Regulations 2011</p> <p>Environment Protection and Biodiversity Conservation Act 1999</p> <p>National Greenhouse and Energy Reporting Act 2007</p> <p>Chain of Responsibility Heavy Vehicle Transport Laws 2014 Waste Classification Guidelines (Relevant State Government)</p>

	<p>National Packaging Covenant</p> <p>State:</p> <p>Work Health and Safety Act 2011 Work Health and Safety Regulation 2017 Protection of the Environment Operations Act 1997 Environmental Planning and Assessment Act 1979 Water Management Act 2000</p> <p>Water Act 1912</p> <p>SSD 9113</p> <p>SSD 10339</p> <p>Local:</p> <p>Local Government Act 1993</p> <p>Lendlease Requirements:</p> <ul style="list-style-type: none"> • GMR: 4.13 Degradation or Pollution of the Environment • GMR: 4.15 Uncontrolled Release of Stored Energy (non-electrical)) • Workplace Delivery Code (WDC)
<p>Summary of Site Controls</p>	<p>Works must be planned, implemented and monitored in accordance with the Lendlease GMRs, the Project EHS Plan, this Sub Plan and the Lendlease Building WDC. These documents detail Lendlease’s approach and commitment to pro-active and responsible site management.</p> <p>A waste management contractor (if project is of appropriate size/type) will be engaged to provide skip bins for waste storage and on-site segregation, and to undertake waste collection for off-site separation, recycling and disposal. The objectives of this Sub Plan and details of the LLB waste recovery targets and FOOTPRINT reporting requirements will be communicated to the contractor who will be required to prepare a detailed, monthly waste breakdown for the project.</p> <p>FOOTPRINT is a web-based portal that tracks and reports the amount of waste, power, water and fuel usages for the reporting period.</p> <p>Site specific waste management controls, monitoring, reporting and performance measures have been identified in this Sub Plan. These include but are not limited to:</p> <ul style="list-style-type: none"> • The establishment of designed waste handling areas; • The correct storage and handling of waste materials including liquids; • On and off-site separation of wastes for reuse and recycling; • Identifying external opportunities for reuse to achieve mutually beneficial outcomes;

	<ul style="list-style-type: none">• Appropriate disposal and verification of all waste leaving site; and• Monthly reporting of waste and recycling data. <p>Waste reduction, storage, separation (for reuse and recycling) and disposal requirements must be included in relevant specifications, contractual agreements, supply agreements, quality assurance documents, and subcontractor work method statements. Criteria for the selection and use of recycled and recycled content products must also be specified.</p> <p>Site inspections, monitoring and reporting will be undertaken by Lendlease and subcontractors as detailed in the EHS Plan and the following implementation table.</p>
--	--

2. IMPLEMENTATION OF THE SUB PLAN

Control Measure	Timing	Methodology	Responsibility	Monitoring and Reporting	Performance Measurement
Planning and Site Establishment					
Identify major waste streams associated with the works.	Prior to commencing	Review construction program and identify waste streams. Engage waste contractor service provider/s.	Construction Manager (CM)	Monthly waste reports from waste contractor.	Achieve minimum 80% recovery (excluding soils).
Key waste streams and recovery are captured and monitored (i.e. landfill and recovered)	Whole of Project	Key waste streams are analysed using Footprint	Construction Manager	Six Weekly	Outlined in the Project Review and discussed
Undertake in-situ sampling and testing of proposed spoil to determine waste classification. Coordinate with Contaminated Land Sub Plan if appropriate.	Prior to works commencing	After consultation with specialised environmental consultant a sampling grid is to be established. Identify any excavated material for reuse on site. Subject to waste classification categories	Construction Manager	Report to be supplied by specialised environmental consultant.	Waste classifications and quantities (m3) confirmed with various options available to project team.
Identify hazardous building materials and options for treatment, reuse and/or disposal.	Prior demolition works commencing	Obtain a Hazardous Building Materials Survey. Prepare a Hazardous Building Materials Survey.	Construction Manager / Site Manager (SM)	Survey available and reviewed. Waste Management Strategy (WMS) to address findings of survey.	Hazardous Materials Register maintained. Materials treated for reuse where feasible.
Request major subcontractors and suppliers submit waste minimisation, take back and recycling details.	At tender and contract finalisation	Identify major subcontractors and suppliers with the largest potential waste impact. Identify practical measures associated with their scope of work or product supply to reduce waste entering the site (e.g. reduced or alternative packaging,	Site Manager	Inspection of incoming materials and packaging to identify new opportunities. Periodic checks of waste skips and	Reduced waste generation and costs. Alternative products identified and used. Bulk handling and reusable/returnable transport containers encouraged.

		take back, use of recycled materials, hire arrangements etc)		subcontractor waste management activities. Monthly waste reports.	Waste and recovery targets tracked.
Based on the identification of key waste types, identify skip requirements for on-site separation, collection, off-site recycling and disposal.	Prior to works commencing	Discuss requirements and targets for waste management with waste contractors. Provide source (i.e. on-site) separation options/facilities. Provide colour coded bins/signage for recyclable and non-recyclable wastes (e.g. lunch, office areas). Provide skips for the collection of mixed construction wastes for off-site separation. Classify waste that cannot be reused or recycled for disposal at approved facilities.	Construction Manager / Site Manager	Weekly inspection checklist (to identify cross contamination, condition of handling areas, bin capacity) Monthly waste report from contractor (meeting requirements of FOOTPRINT). Monthly waste reporting by subcontractors (i.e. power, water and waste receipts)	Adequate number and type of litter bins available. Contractors made accountable for placing waste in the correct bins. Cross-contamination traced to responsible subcontractor to rectify. Waste recovery targets met.
Include information in the Site Induction about waste minimisation and management and the conservation of resources including paper, electricity and water.	Prior to works commencing	Revise Lendlease induction package to include site specific risks and information. Deliver induction material.	Construction Manager / Site Manager	WMSs prepared by subcontractor's address waste minimisation and management and the use of recycled products.	Site induction delivered to all workers on site.
Establish suitably located and designed stockpile, waste and material storage and handling areas.	Prior to works commencing	Mark details of waste handling and new material storage areas on the Environmental Management Diagram (Appendix 1). Protect stored materials from damage (e.g. weather).	Construction Manager / Site Manager	Weekly/monthly inspection checklist.	Reuse and on-site separation of waste maximised. Loss of materials and resources of value due to damage, prevented.

Identify wet trade washout requirements and establish appropriately designed and located facilities.	Prior to works commencing	Identify an area of the site away from drains and waterways. Establish suitable facilities. Identify a licenced liquid waste transporter. Incorporate water recycling. Document a procedure for the wash out and disposal of acrylic and solvent based paints. (Third party proprietary system preferred)	Construction Manager / Site Manager	Weekly/monthly inspection checklist. Daily monitoring of waste area operation. Waste/recycling reports.	Facilities should be stand-alone. (i.e. NOT connected to stormwater or sewer). No uncontrolled discharge of washout. Facilities maintained in good condition with capacity.
Establish a suitably designed and located concrete waste washout facility.	Prior to works commencing	Identify an area of the site away from drains and waterways. Maintain the facility so that dried concrete/slurry can be removed for recycling.	Site Manager	Weekly/monthly inspection checklist. Daily monitoring of waste area operation. Waste/recycling reports.	No excess concrete left on site. No hardened spills/ pours left on site.
Establish a suitably designed and located Wet trades washout facility.	Prior to works commencing	Specifically design plant to enable recycling of water from solid wastes (slurry) which maximises water reuse and minimises solid waste generation.	Site Manager	Weekly/monthly inspection checklist. Daily monitoring of waste area operation. Waste/recycling reports.	Washout area kept clean and drains/sumps operating.
Implement the requirements of the Sustainable Site Setup checklist.	Prior to commencing works	Implement energy, water and waste sustainability initiatives to achieve agreed levels.	Construction Manager and Site Manager	Six monthly audits.	Agreed level achieved and maintained during construction.
Planning for Waste Minimisation					
Identify major suppliers and material requirements and identify opportunities to minimise packaging.	Prior to and during construction	Review supply agreements, contractor materials and packaging proposals with the view of minimising waste to site.	Construction Manager and Site Manager	Inspect material deliveries. Specifications met.	Proven examples of packaging reduction. Use of recycled materials and recycled content products.

		Subcontractor WMS to address waste minimisation.			
Encourage the identification and procurement of recycled materials and recycled content products (e.g. timber, concrete, road base, asphalt etc)	Prior to works commencing	Request input from subcontractors and suppliers to nominate products that include a recycled component. Subcontractor WMS to address. Check compliance with specifications and ensure the material is fit for purpose. Obtain clearance certificates for all imported fill/products.	Project Manager / Construction Manager	Tabled in design and pre-contract meetings. Sign off on product selection.	Material received with clearance certificates (i.e. no contamination) and fit for purpose.
Raise worker awareness of environmental conservation matters.	Prior to and during works.	Display posters and signage and deliver toolboxes addressing the conservation of resources and waste minimisation.	Site Manager	Waste data. Feedback on resources.	Toolboxes delivered. Positive feedback received.
Planning for Waste Reuse and Recycling					
Maximise the reuse and recycling of demolition materials.	Prior to works commencing	Subcontractor to prepare a demolition strategy addressing waste segregation and identifying was reuse and recycling opportunities. Provide suitable skips to enable on-site waste separation.	Construction Manager and Site Manager	Demolition waste types identified. Demolition strategy reviewed and agreed. Waste facility reports/ dockets.	Waste reused, recycled and disposed tracked against projected targets.
Segregate waste building materials (e.g. concrete, timber, steel, etc) on site and store in separate bins.	At all times	Discuss project requirements with the waste contractor. Maintain waste storage areas and provide bins and clear signage. Maintain a materials reuse area to divert materials of value from recycling and disposal skips.	Site Manager	Weekly/monthly inspection checklist. Monthly waste reports.	Clean and tidy waste management area. Nil to minimal cross contamination of waste types.

Ensure imported fill and recycled road products and landscape materials are accompanied by a clearance certificate.	At all times	Verify the type and content of all materials delivered to site.	Construction Manager and Site Manager	Inspection of deliveries. Clearance Certificate	Certificate provided prior to materials being placed on site. No ex-situ site contamination.
Co-ordinate the sharing and reuse of raw materials, excess products, and building materials including plywood, hoarding, fencing, concrete and formwork where possible.	During construction	Establish a dedicated material reuse area for the collection of materials suitable for reuse. Ensure materials are compliant to specification and fit for purpose. Document reuse and recycling options in subcontractor WMS (e.g. formwork and concrete contractor).	Construction Manager and Site Manager	Discussed in project and subcontractor meetings. Reinforced through toolbox talks. Weekly/monthly inspection checklist. Recycling facility dockets.	Documentation of actual examples as a case study. Quantified in project reviews.
Storage of Waste					
Maintain waste handling and storage areas for solid and liquid wastes in good condition.	At all times	Store liquids/liquid waste in secure, well ventilated, covered, bunded areas. Store materials in original containers (label intact). Seal containers securely and do not stack unless secured. Provide a spill control kit and clean up spills immediately. Maintain washout facilities.	Site Manager	Weekly inspection of waste areas to assess condition of storage and waste collection areas and identify maintenance requirements.	Nil to minimal cross contamination of wastes. No spillage or loss of wastes from collection containers in storage areas. No 'orphaned' drums identified on site during inspections (i.e. drums/containers left outside of a bunded area)
Chemical wastes protocols developed to ensure these wastes are stored correctly (in sealed drums) in designated, bunded areas.	All times	Dedicated bunded area with 110% capacity of stored goods. Area should be covered if possible.	Site Manager / Foreman/ supervisor	Weekly inspection of Waste Collection Areas.	Correct covers and containers for waste No spillages/loss of waste during storage.
Encourage good site 'housekeeping' in material handling and storage areas to prevent damage and the loss to	At all times	Communicate material handling and storage requirements to subcontractors.	Site Manager	Weekly inspection checklist to identify inappropriate storage or	No loss due to poor storage.

materials due to physical impact and weather events.		Address in subcontractor WMS.		the waste of materials and resources.	
Disposal of Waste					
Dispose of waste using licensed contractors to appropriately licensed or approved facilities.	At all times	<p>Consider reuse and recycling options before disposal.</p> <p>Develop WMS for the transportation of waste.</p> <p>Check EPL/approval for facilities receiving waste and recyclables.</p>	Site Manager	<p>Inspection of waste transport licenses and vehicles.</p> <p>Monthly waste report.</p> <p>Disposal docketts.</p>	<p>No waste disposed to unlicensed facilities.</p> <p>Copies of disposal documentation maintained and tracked in FOOTPRINT.</p> <p>No illegal placement of waste on land or in water.</p> <p>Waste, reuse, recycling and recovery data tracked in FOOTPRINT.</p>
Where spoil cannot be reused, dispose of excavated materials off-site.	At all times	<p>Use a licensed waste contractor to transport spoil to an appropriately licensed or approved facility.</p> <p>Complete required checks and forms and seek approval for disposal off-site to a non-licensed property.</p>	Construction Manager / Site Manager	<p>Tracking of materials transported off-site (i.e. through docketts etc).</p> <p>Waste classification reports.</p> <p>Subcontractor energy and waste reporting form (submitted monthly with progress claim)</p>	<p>Reconciliation of tracking registers and docketts.</p> <p>Soil quantities tracked in FOOTPRINT.</p>
Immobile hazardous waste prior to removal off site for disposal.	At all times	<p>Engage specialist consultant.</p> <p>Identify appropriate licensed contractor to remove and transport waste to licensed landfill.</p>	Construction Manager / Site Manager	<p>Written approval received from specialist and relevant environment authority.</p> <p>Waste sampling and classification reports.</p> <p>Clearance Survey/report.</p>	<p>Reconciliation of tracking registers and docketts.</p>

Appropriate disposal of all wastewater from site operations (i.e. paint washing) or temporary facilities (i.e. toilets).	At all times	Collection and disposal of wastewater by approved licensed contractor	Site Manager	As required	Waste disposal docket correspond to waste types/ volumes.
Track the disposal of chemical and hazardous wastes in accordance with authority requirements.	At all times	Arrange transport in consultation with specialised contractor and consultant.	SM/Foreman / supervisor	Random inspection of waste transport licenses and vehicles.	Correct covers and containers for waste transfer. No spillages/loss of waste during transport.

APPENDIX 1: Key Waste Streams - ASB

Waste Type	Common Handling Options and Bin Sizing	Methods Available for Management
Asphalt	10m ³ bins	Reused in temporary works or site levelling or to establish walkways, driveways or stabilised areas. Transported off site for recycling.
Cables and parts	10m ³ bins comingled with construction wastes	Any metal components are to be segregated and the remainder taken off-site to landfill
Concrete (liquid slurry) from washout.	Appropriately designed and located dedicated washout facility	Off-site recycling of solids (slurry). On site recycling of waste water if possible.
Concrete (solid)	10m ³ bins	Reused to establish walkways, driveways or stabilised areas. Reused in temporary works or site levelling. Transported off site for recycling.
Drums and containers (empty and containing no residue)	Stored in bunded areas for collection	Removal off-site by a licensed contractor for rinsing, recycling or disposal at a licensed landfill.
Excavated spoil (clean soil, rock etc)	Stockpiles Trucks	Reuse on site if possible. Reuse off-site under a resource recovery exemption or licence (beneficial reuse). Disposal off-site.
Excavated spoil contaminated	Stockpiles Trucks	Approved treatment and reuse on site if possible. Reuse of treated material off-site (where permissible). Disposal off-site to an appropriately licenced facility.
Food packaging/cans/bottles	240L bins	Recyclables sorted for collection and off-site recycling.
General domestic wastes	240L bins	Collected from site for disposal
Glass/plastic/cans/paper/cardboard	240L bins	Off-site recycling
Green waste	Trucks or large skip	Chipped on site. Transported to off-site centre for recycling
Liquid from wet trades (e.g. paint, dry walls, renderers, tilers etc)	Dedicated washout facility/treatment system.	Off-site recycling of solids (slurry) On-site recycling of water.
Oily rags and filters	200L bins	Off-site recycling by licensed waste oil recycler
Organic food scraps	240L bins	Off-site to landfill with other non-recyclable municipal waste
Paper and office-based wastes	240L bins	Off-site recycling
Printer Cartridges	Special collection bin	Off-site recycling


Scrap metal/steel	10m ³ bins	Off-site recycling
Sediment controls	Stored on site	Reuse controls where possible on the site or at other local sites.
Sediment build up behind control structures	Stockpile Immediate reuse on site	Respread on site, unless obvious contamination is present (colour/smell)
Spill control materials (e.g. absorbent pads/booms containing hydrocarbons, chemicals)	Containers, bins and/or tanks that have been suitably banded	Taken off-site to landfill.
Timber	10m ³ bins	Segregated and recycled off-site or disposed
Waste oil, grease, lubricants	Sealed and stored in original container in banded areas for collection.	Off-site recycling by licensed contractor.
Plastic wrapping/containers	240L bins	Off-site recycling or landfill as appropriate.

APPENDIX 2: Key Waste Streams - IASB

Waste Type & approx. Volumes	Common Handling Options and Bin Sizing	Methods Available for Management
Asphalt – 100m ³	10m ³ bins / bogie truck removal.	Reused in temporary works or site levelling or to establish walkways, driveways or stabilised areas. Transported off site for recycling.
Cables and parts – 50m ³	10m ³ bins comingled with construction wastes	Any metal components are to be segregated and the remainder taken off-site to landfill
Concrete (liquid slurry) from washout. <i>n/a</i>	Appropriately designed and located dedicated washout facility	Off-site recycling of solids (slurry). On site recycling of waste water if possible.
Concrete (solid) – 250m ² kerbs, 600m ² pavements	10m ³ bins	Reused to establish walkways, driveways or stabilised areas. Reused in temporary works or site levelling. Transported off site for recycling.
Drums and containers (empty and containing no residue) – <i>n/a</i>	Stored in bunded areas for collection	Removal off-site by a licensed contractor for rinsing, recycling or disposal at a licensed landfill.
Excavated spoil (clean soil, rock etc) – 7000m ³	Bogie Trucks	Reuse on site if possible. Reuse off-site under a resource recovery exemption or licence (beneficial reuse). Disposal off-site.
Excavated spoil contaminated – 500m ³	Stockpiles Bogie Trucks	Approved treatment and reuse on site if possible. Reuse of treated material off-site (where permissible). Disposal off-site to an appropriately licenced facility.
Green waste – trees as per approval – 2 bogies	Bogie Trucks or large skip	Chipped on site. Transported to off-site centre for recycling
Liquid from wet trades (e.g. paint, dry walls, renderers, tilers etc)	Dedicated washout facility/treatment system.	Off-site recycling of solids (slurry) On-site recycling of water.
Oily rags and filters	200L bins	Off-site recycling by licensed waste oil recycler
Organic food scraps	240L bins	Off-site to landfill with other non-recyclable municipal waste
Paper and office-based wastes	240L bins	Off-site recycling
Printer Cartridges	Special collection bin	Off-site recycling
Scrap metal/steel	10m ³ bins	Off-site recycling
Sediment controls	Stored on site	Reuse controls where possible on the site or at other local sites.

Sediment build up behind control structures	Stockpile Immediate reuse on site	Respread on site, unless obvious contamination is present (colour/smell)
Spill control materials (e.g. absorbent pads/booms containing hydrocarbons, chemicals)	Containers, bins and/or tanks that have been suitably banded	Taken off-site to landfill.
Timber	10m ³ bins	Segregated and recycled off-site or disposed
Waste oil, grease, lubricants	Sealed and stored in original container in banded areas for collection.	Off-site recycling by licensed contractor.
Plastic wrapping/containers	240L bins	Off-site recycling or landfill as appropriate.

ENVIRONMENTAL MANAGEMENT DIAGRAM– RANDWICK CAMPUS REDEVELOPMENT PROJECT

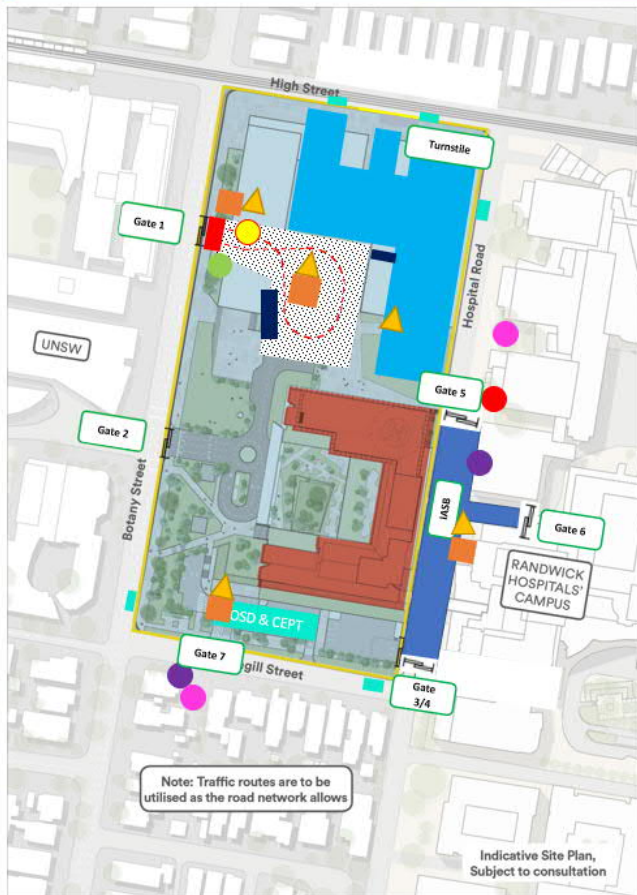

EXTENT MAP



KEY ENVIRONMENTAL ISSUES

- Dust both within site and leaving the site perimeter
- Unexpected finds
- Noise to general public
- Water Run Off
- Sediment Run Off

SENSITIVE RECEPTORS

- UNSW
- Randwick Hospital Campus (including Sydney Children's Hospital, Royal Women's Hospital, Prince of Wales Public & Private Hospital)
- Local Residents (High Street & Magill Street)

KEY CONTROL MEASURES

- Soil is to be managed in accordance with the RAP
- Silt barriers consisting of geotextiles with secondary filtering material will be established at one meter offsets from drains
- Geotextile to cover over drains to filter water along with sand bags when required
- Additional dust monitors in place within the Hospital Buildings along Hospital Road
- Sprinklers and water carts to reduce dust Ring main water around inside of hoarding with hose connections to control work zones
- Sprinklers set up over waste bins for dust suppression when emptying smaller bins
- Sealed hard stand area for materials handling
- Coconut logs for sediment control on Hospital Rd works

KEY CONTACTS PERSONS

Senior Construction Manager: Richard Yarad 0457 514 891

Senior Site Manager: Steve Polsen 0488 051 797

Emergency Services: 000

EHS Coordinator: Nigel Rose 0428 741 878

General Foreman: Marco Farina 0409 685 587

LEGEND

Icon	Descriptions
	Perimeter A-Class Hoarding
	Vehicle Entry Gate
	Site Accommodation and Offices
	Spill Kits
	Tyre cleaning run off pond (inclement weather)
	Vibration Monitors
	Acoustic Monitors
	Stormwater inlet
	Delivery vehicle movement
	Shaker grid
	Hazardous Materials and Dangerous Good Storage
	Dust Monitor
	Two coat chip seal hard stand area
	Refuel area for wheeled vehicles
	Waste bins